


Manual 'Crack Glass' Call Point, surface

Part No. **BF370R**

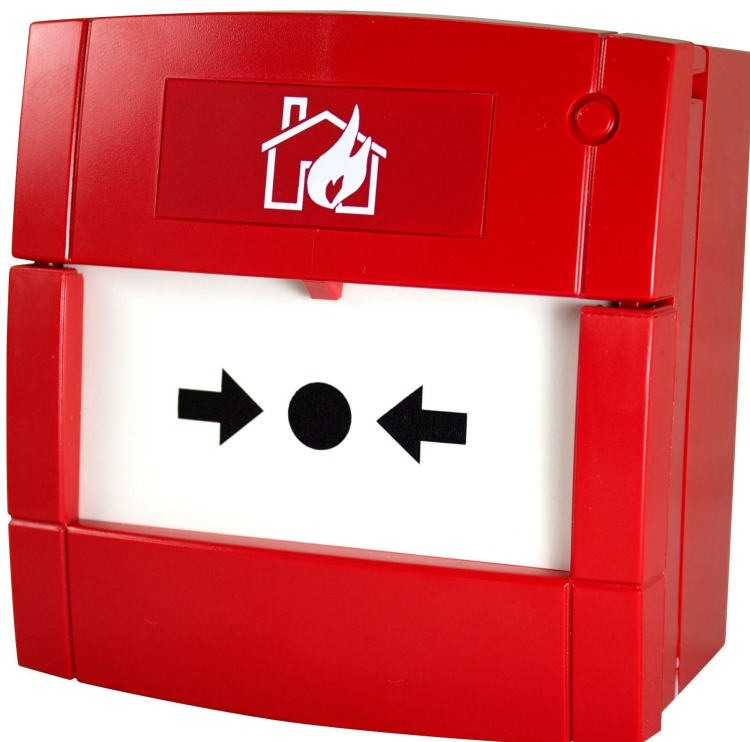

Overview

- Certified to EN54 Part 11 (LPCB/VdS).
- Unique 'Plug & Play' installation concept.
- Supplied with a glass element.
- Includes a 470Ω resistor, test key and red back box.
- Anti-Tamper facility.
- Flush version (without a red back box) also available (order code BF370RF).



More Information

Technical Specifications

| | |
|--------------------------|--|
| Approvals/certifications | Certified to EN54 Part 11 by the LPCB & VdS. |
| Supply/operating voltage | 30Vdc max. |
| Product dimensions (mm) | 93 W x 89 H x D 60mm (includes back box). 28mm D without back box. |
| Construction & finish | Red ABS. Glass element. |



IP Rating IP24D.
Weight 180g (130g without back box).
Properties Supplied with a 470Ω resistor.
Operating conditions/temperature -10°C to +55°C.



T 01942 322744 E sales@c-tec.co.uk
F 01942 829867 W www.c-tec.com



C-TEC, Challenge Way, Martland Park, Wigan, WN5 0LD United Kingdom